


/

Network)

PROFIBUS-DP

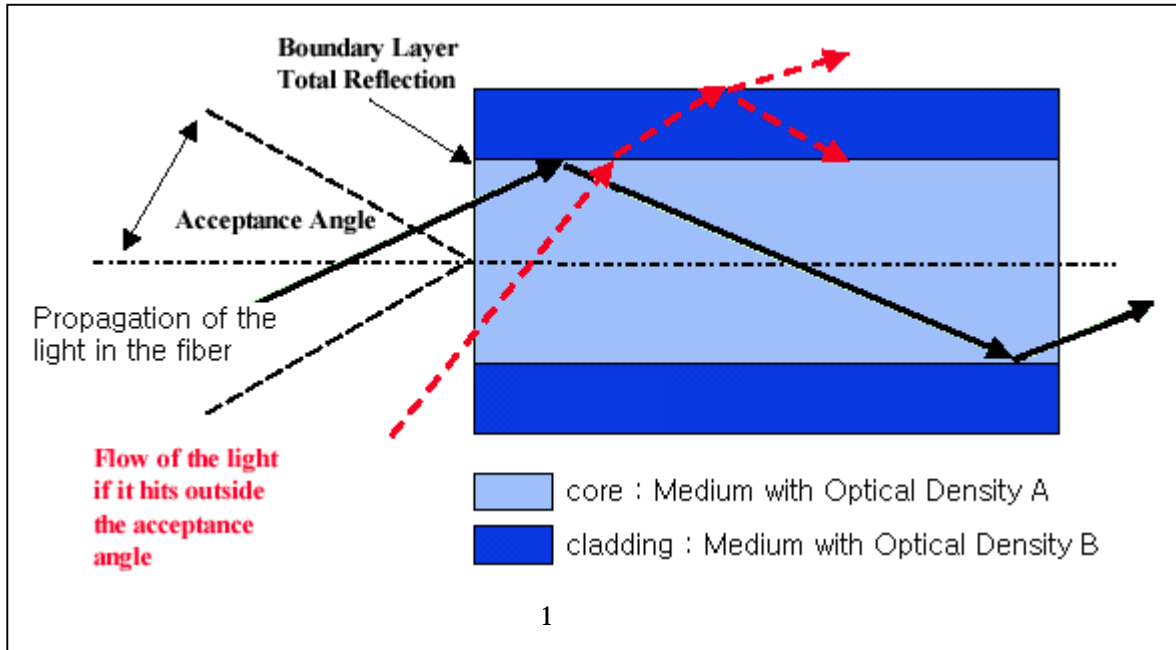

(1)

(Ring)


(Acceptance angle)

(OLP optical link plug

- Interbus-S register bus 가


가


WAN(Wide Area

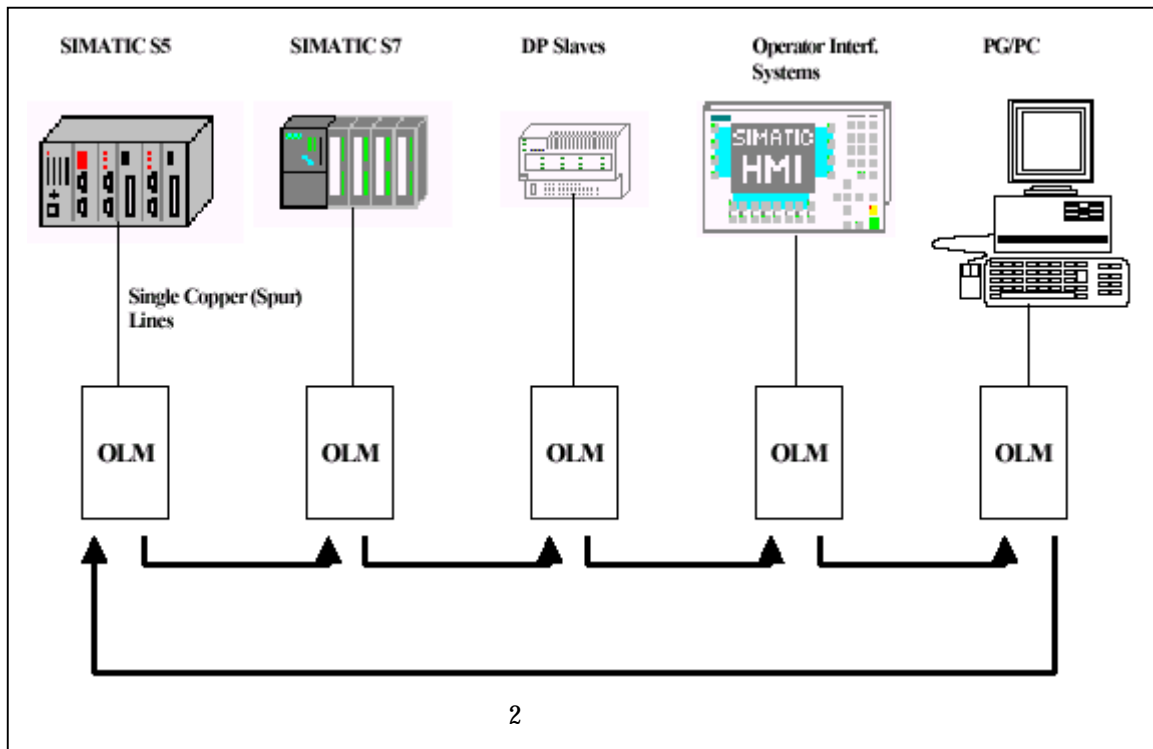

(Line)


- Bus
- 가

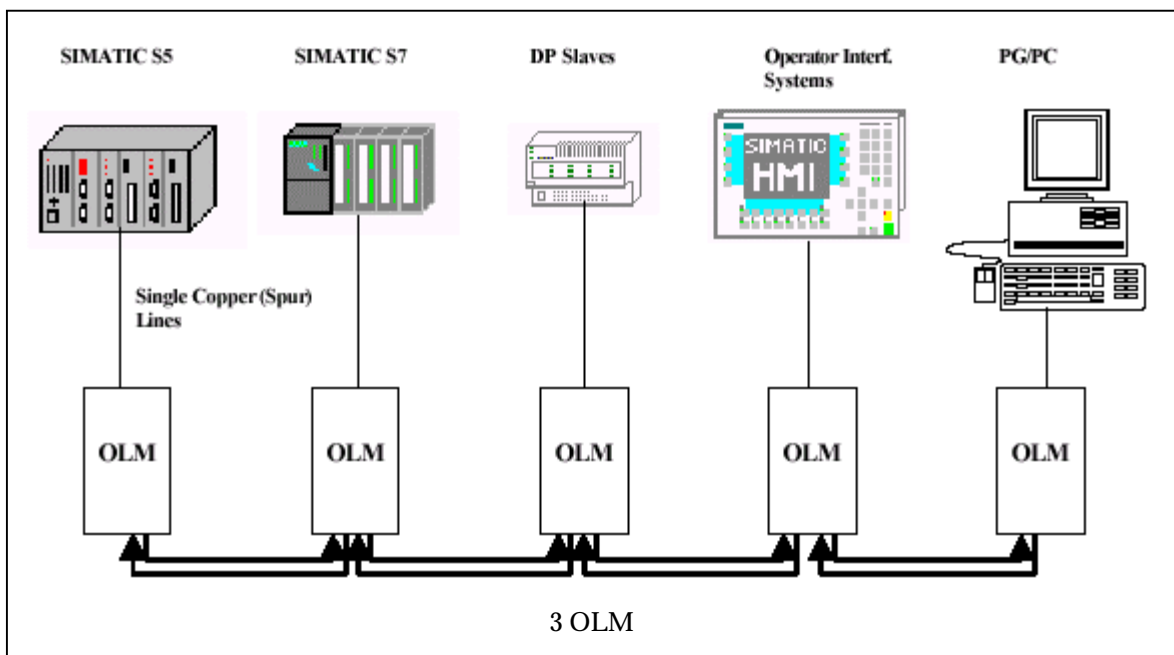

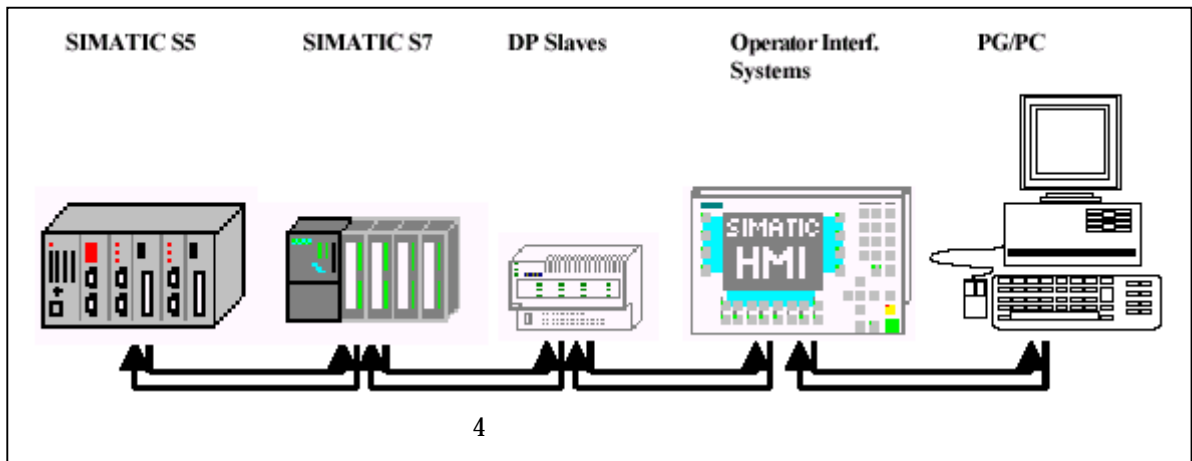


Star

- (Topology) 가
- account

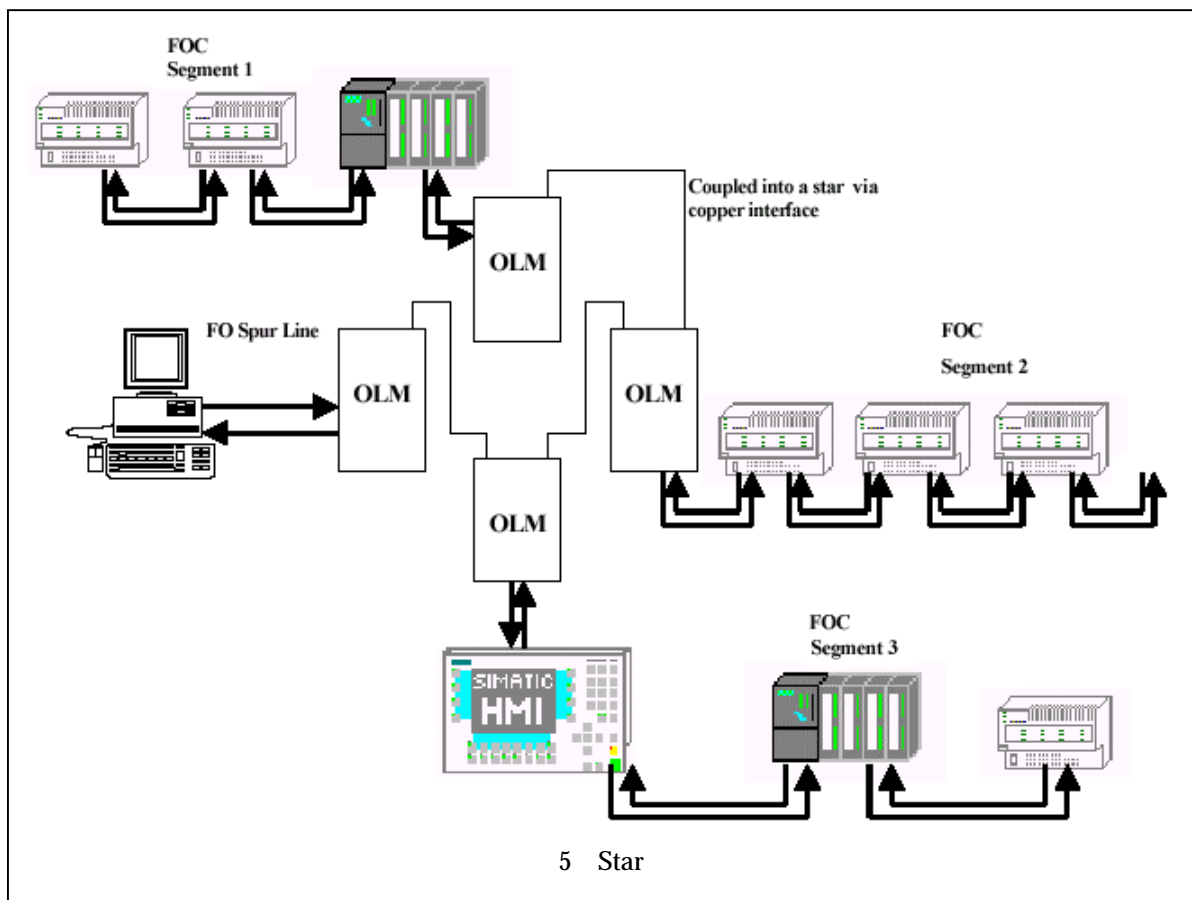

ring

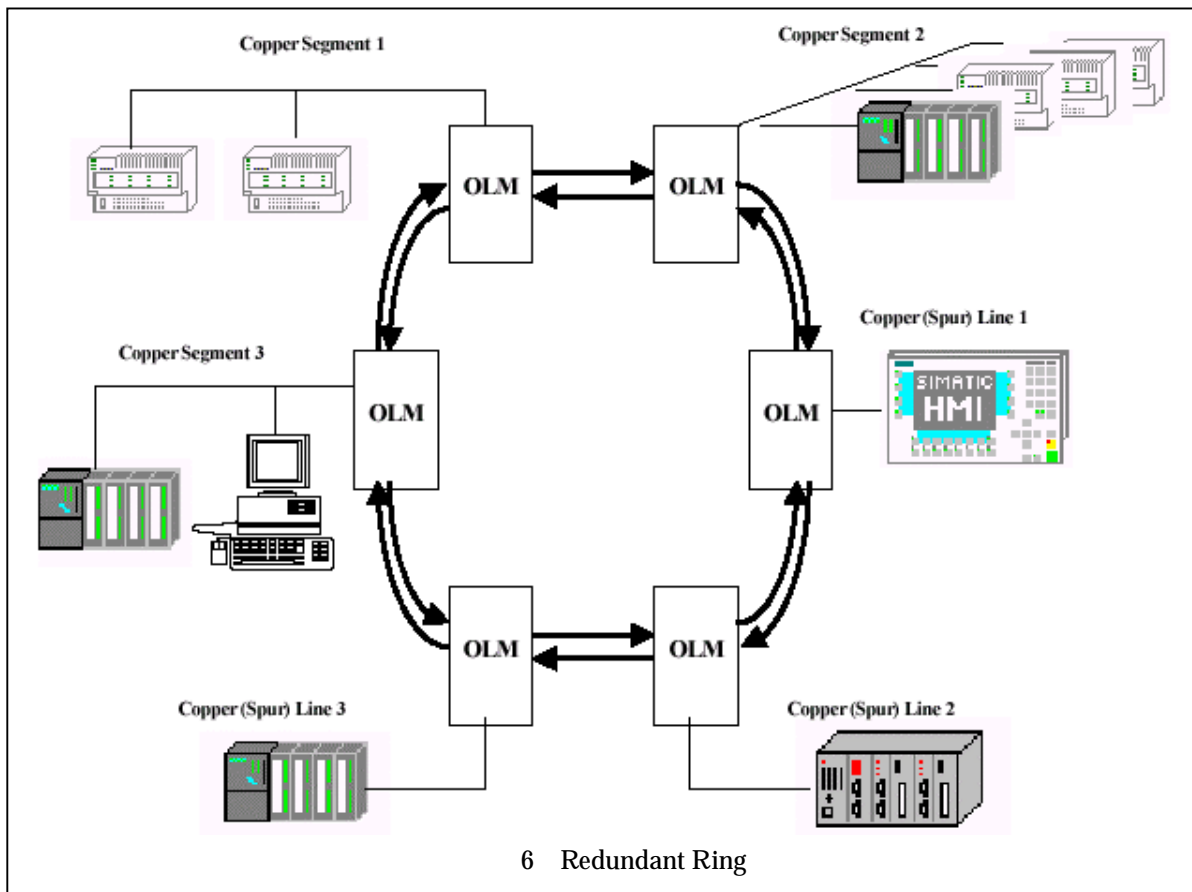

LIKO(light coupler)

- | | |
|-------------------|----------------------------------|
| ASIC LIKO | - Line |
| | Station |
| - Station channel | - 가 PROFIBUS address |
| (Copper) | 125 |
| - | Baud rates |
| - Bus Station | - 9.6kBit/s 12MBit/s(PROFIBUS PA |
| 가 | 45.45kBit/s) |

- POF; Polymer Optical Fiber
- PCF; Polymer Cladded Fiber

- PCF connector
- 가 ;

- POF 50m
- PCF 300m

- LIKO

Connection Engineering

- POF Crimpless

- LIKO

